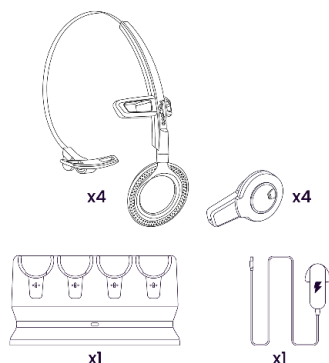
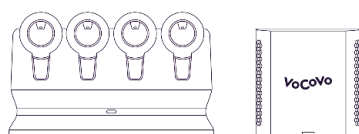
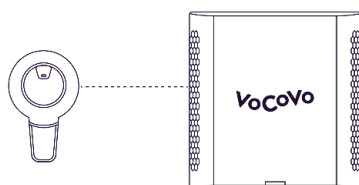


Guide 3.1. What's in the box?**Step 1**


When you open your VoCoVo Link box, you'll find everything you need to get four colleagues communicating on a single conference.

**Step 2**

There is one Dock with the Hub clipped into the back and four Headsets clipped into their charging sockets.

**Step 3**


These Headsets are pre-registered with the Hub, so you can get going straight away.

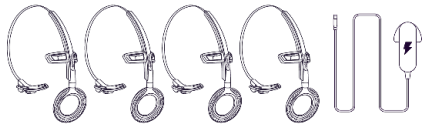

Step 4


You will also find four headbands, a power supply and a cable.

Guide 3.2. What configurations are available?

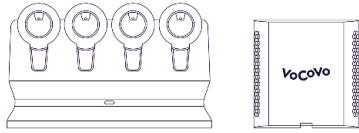

Step 1


Your VoCoVo Link is easy to use straight out of the box but its modular design makes it very flexible, powerful and easy to extend.

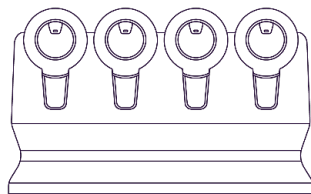

Step 2

Single-Hub (up to four Headsets).


This default configuration lets up to four people talk over the same conference. You'll find everything you need to set it up in the box. Requires one VoCoVo Link.

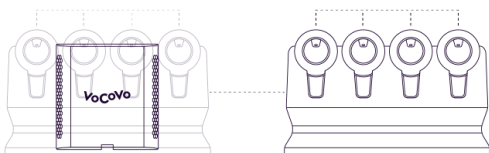

Step 3

Single-Hub mode (up to eight Headsets).


If you have more colleagues who need Headsets, then you can add up to an additional four Headsets to the same Hub. Requires two VoCoVo Links.

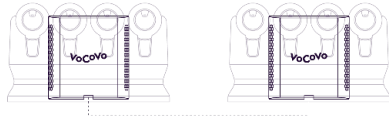

Step 4


Dual-Hub mode (up to eight Headsets). If you need additional coverage for your store, then you can connect two VoCoVo Hubs together to provide greater coverage. Requires two VoCoVo Links.

Guide 3.3. When to use different configurations

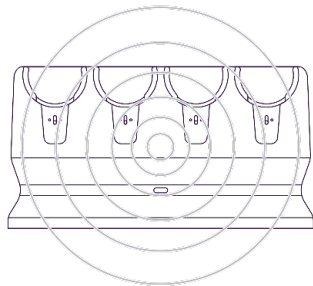


Step 1

For most locations, a Single-Hub setup will provide ample coverage. The Hub has a range of approximately 50m (160ft) indoors.

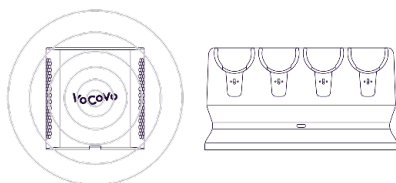


Step 2

The simplest option is to keep the Hub in the charging Dock. But you can also separate the Hub from the Dock and have them in two different locations, eg. to place your Hub in an area that gives the best coverage. Your VoCoVo Reseller can help with this during installation.

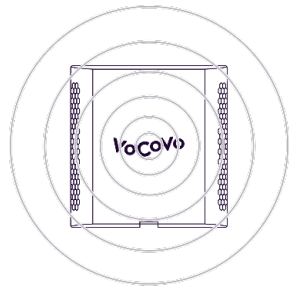

Step 3


VoCoVo Link can support up to eight S5e Headsets, so if you have additional staff on shift at the same time, then you can purchase a second VoCoVo Link and register up to four other S5e Headsets on the original VoCoVo Link device.

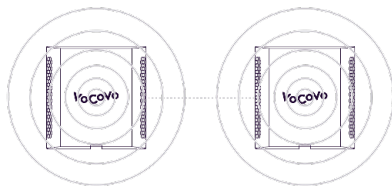

Step 4


The Dual-Hub setup is recommended for larger stores, such as ones across more than one floor. This does require network cables and a switch to be connected up, so please bear that in mind.

Guide 3.4. Registering additional S5e Headsets

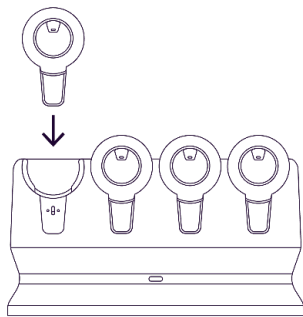


Step 1


If you need to add extra Series 5e Headsets to your Hub, follow these steps: First Clip the Headset into the Dock.

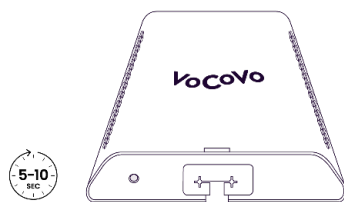

Step 2


Next, put the Hub into registration mode. Press and hold the **Hub reset** button for 5-10 seconds until the Hub LED blinks green (it'll stay in registration mode for around 3 minutes).

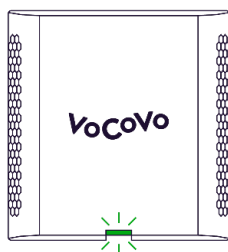

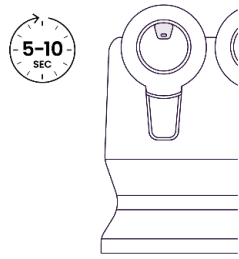

Step 3


Put the Headset into registration mode. While the Headset is charging, press and hold the **Volume** button for 5-10 seconds, until the LED rapidly blinks green then returns to normal.

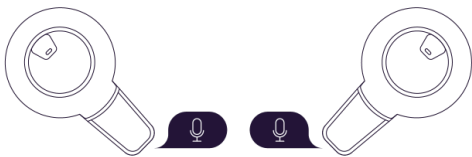

Step 4


Test your Headset. Use a second Headset that's already registered to the Hub and confirm that your S5e Headset is working. If it does not work, retry the registration process.

Guide 3.5. Registering/Synchronising Hubs.

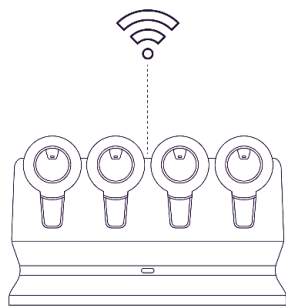


Step 1

Registering two VoCoVo Links.

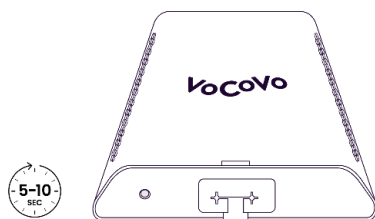


Step 2

On one of the Hubs, press and hold the white **Reset** button at the base of the Hub) until its LED starts blinking green (about 5 to 10 seconds). Do the same for the second Hub.

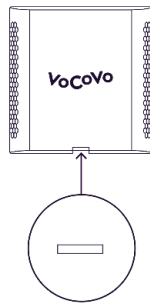


Step 3

As the two VoCoVo Links pair, the LEDs will go through the following sequence. This can take up to 3 minutes. No light for a few seconds.

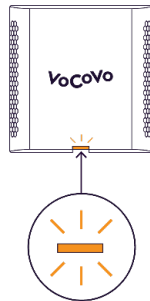


Step 4

Blinking orange which indicates the Hubs are restarting.

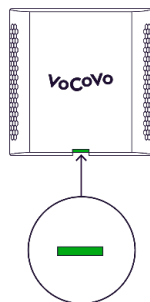

Step 5

Solid green which indicates the Hubs are paired.

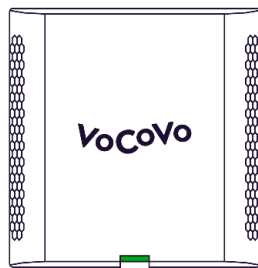

Step 6

Each Hub will remain in registration state for approximately 5 minutes, before the LEDs return to their normal solid green state.