


CON-SPACE

COMMUNICATIONS

Safety in Communication®

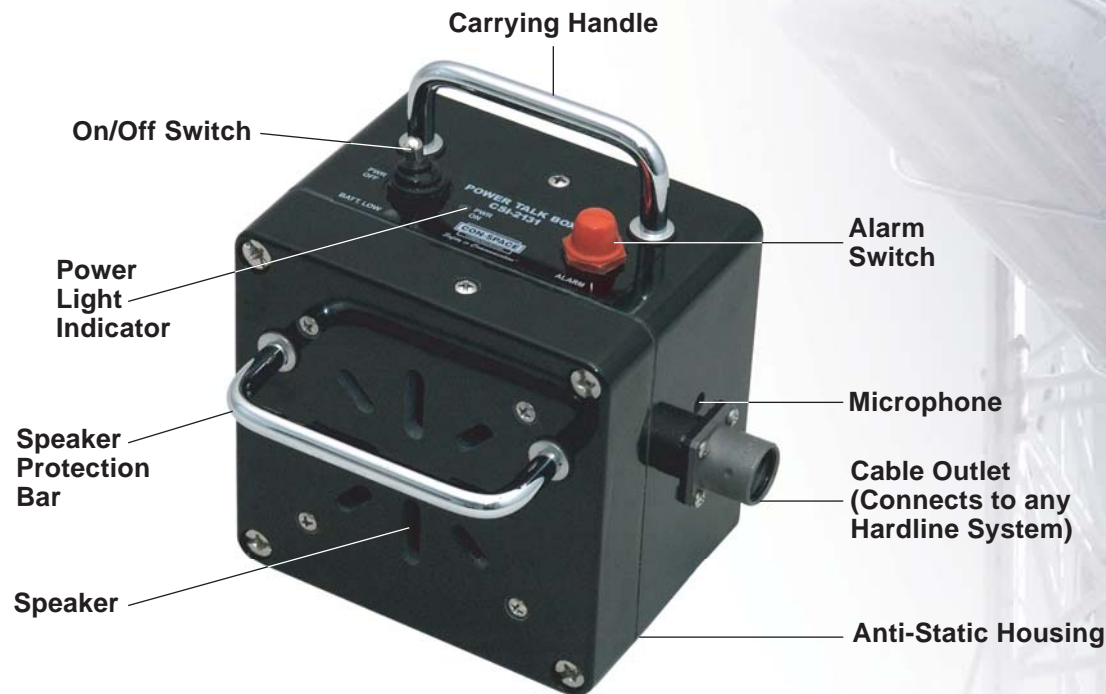

the CSI-2131

Power Talk Box

for Simple Hands-Free, Untethered
Two-Way Voice Communication




DO MORE WITH YOUR CON-SPACE HARDLINE SYSTEMS!

the Power Talk Box...

- Provides, Untethered, Two-Way Voice Communication
- Is 30-times Louder than the CSI-2130 Talk Box
- Has Unlimited Confined Space Applications
- Can be Lowered over the side of Structures & Cliffs
- Can be used for working in Trenches
- Can be set up as a Command Post or Training Aid
- Is Rugged, Reliable & Completely Waterproof
- Is Intrinsically Safe Approved

Learn more on our website, www.con-space.com

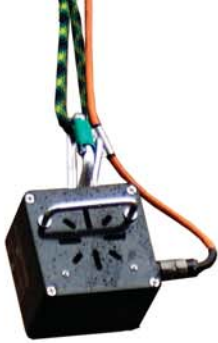

the CSI-2131 Power Talk Box

The CSI-2131 Power Talk Box is a continuous hands-free, two-way communication accessory which connects to CON-SPACE CSI-1000 or CSI-2000 Hardline Communication Systems. The Power Talk Box is identical in function to its sister product the CSI-2130 Talk Box, but the amplifier circuitry and larger speaker make it over 30 times louder. A molded fiberglass enclosure houses state of the art electronic circuitry with A.G.C. , a high output Speaker and a sensitive Microphone. The A.G.C. (Automatic Gain Control) circuitry protects other users on the system from any unwanted high noise peaks. Another built-in safety feature is the critical placement of controls and accompanying hardware to prevent either the speaker or the microphone from being obstructed and blocking communication at anytime. The industrial speaker is completely waterproof and unit is constructed to survive harsh working conditions. Parts and components used in the manufacture of the Power Talk Box are of the highest quality providing users with an extremely rugged and reliable accessory.

Features

- Reliable, Rugged, Waterproof Construction
- Amplified Signal Output with A.G.C.
- Portable, powered by 3 "C" Cell Batteries
- Alarm activation button
- Carabiner attachment point for Lowering
- Low battery LED (red)
- Power Indicator LED (green)
- High Output Speaker
- Highly sensitive Microphone
- Anti-Static Housing

Benefits

- Continuous Two-way Communication
- Hands-free Untethered Operation
- Improved Team Work
- Compliance with Safety Regulations
- Increased Efficiency and Productivity
- Not subject to dead spots or interference
- Multi-Purpose Communication Accessory
- Connects to both CSI-1000 & CSI-2000 Systems
- Easy To use



Power Talk Box (Part NO. 0103-02-001)

CSI-2131 Power Talk Box Module



Applications

- Aircraft Fuel Cells
- Lift Stations
- Pits & Dry Wells
- Shafts & Silos
- Manholes
- Trenches
- Control Room Monitoring
- Incident Command (Entrant Monitoring)
- Technical Rescue Operations & Training
- Trench & High Angle Rescue
- Line Haul Operations

Contact us today!

Canada / U.S.: 604.244.9323 / 402.477.0086
Toll Free: 1.800.546.3405 (in North America)
UK & Europe: +44 (0) 1636 642484

Email: sales@con-space.com

Authorized Distributor:



Safety in Communication®

www.con-space.com

Intrinsic Safe Approvals

U. S. A. FACTORY
MUTUAL
MSHA
*2000 System Only

CANADA CSA

EUROPEAN UNION INTERTEK

Class I,II,III, Division 1
Groups A,B,C,D,E,F,G, T3C
Meets the requirements of Title 30
Code of federal regulations, Part 23 and is
approved for use in gassy mines. (methane
air mixtures only) Approval No. 9B-199-0
Class I, Division 1, Groups A,B,C,D; Class
II, Group G and Coal Dust; Class III, T3C
0359, II 1 GD CE
EEx i a IIC T4
ITSO3ATEX21856X (for 1000 Systems)
ITSO4ATEX21945X (for 2000 Systems)

Bid Specifications

Output level: 85 dBA at 1 m
(A.G.C.) Automatic Gain Control:
Response Time: 10 m.sec
Recovery Time: 2 seconds
Compression Range: 40dB Battery Life: 200 hrs. at normal activity
Operating Temperature: -20° C to +40° C
Overall dimensions: 152mm x 140mm x 124mm; (6" x 5-1/2" x 4-7/8")
Enclosure dimensions: 120mm x 118mm x 89mm; (4-3/4" x 4-5/8" x 3-1/2")
Weight: 1.5 kg (3.3 lbs.) with batteries
Required Batteries: 3 C-sized Alkaline Batteries

Warranty

All CON-SPACE modules and accessories, except Cables and Cable Assemblies, are warranted for one year against defects in workmanship and materials. This does not include damage caused by misuse and specifically excludes Cable Assemblies. No other warranties are expressed or implied.